


**narrow cut, fully refined paraffin for tapers, pillars
and cut 'n' carve candles**

Paraffin wax 4045 EP

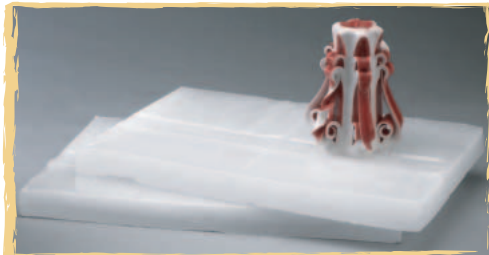

Test Description	ASTM Method	Typical
Melting Point °F	ASTM D-57	142
Oil Content Mass %	ASTM D-721	0.18
Penetration @ 25°C	ASTM D-1321	10
Color Saybolt	ASTM D-156	+30
U.V. Absorbance	ASTM 178.3710	Pass

Recommendations

- ☞ This wax is a straight paraffin, additives are recommended for common results.
- ☞ Pouring temperatures will vary depending on application 170°-185° F.

Packaging

- ☞ 4045 EP is available in 52 lb. cases - 40 cases per pallet (2,080 lbs.) - Slab on pallet (1,896 lbs.).
- ☞ Available in PA - cases and slab on pallet.
Available in CA - Slab on pallet only.

FDA Status

- ☞ 4045 EP is a food grade paraffin that is manufactured in compliance with FDA regulations covered under Title 21, sections 172.886 and 178.3710.



The Candlewic Company

825 Easton Road, Doylestown, PA 18901 | 8244 Easton Road, Ottsville, PA 18942
Doylestown, PA: 800-368-3352 | Ottsville: 610-847-3069 | www.candlewic.com